




INPRO/SEAL[®]

A **DOVER** COMPANY

BEARING ISOLATOR REQUEST FOR QUOTE

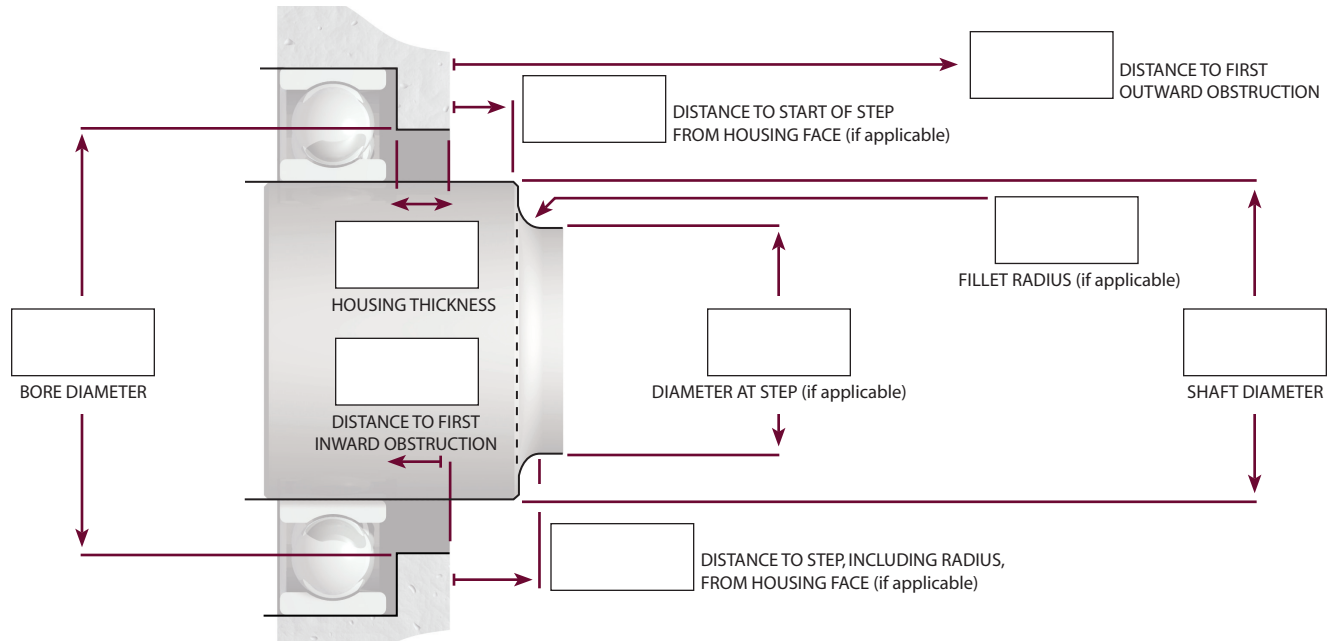

MEASUREMENTS ARE IN: **US STANDARD** **METRIC**
 PLEASE SUPPLY ALL DIMENSIONS TO 3 DECIMAL PLACES

Data Needed For Quote

APPLICATION: Pump Motor
 Other:

CURRENT SEALING SOLUTION: Lip Laby
 Other:

SHAFT POSITION: Horizontal Vertical Up Vertical Down

BEARING TYPE: Ball Sleeve Roller

MOUNTING: Standard Press-Fit Flange
 Other:

PRIMARY FOCUS: Contamination Lube Retention Both

LUBE: Oil (level):
 Grease Oil Mist Forced Oil System

FIRST OBSTRUCTION: Outward Inward Step On Shaft

AXIAL MOVEMENT:

SHAFT SPEED:

MISALIGNMENT:
 Diametric Run Out > .005" TIR? Yes No
 Shaft To Bore Misalignment > .007" TIR? Yes No

TEMPERATURE AT SEAL LOCATION:

ENVIRONMENT:

SEAL HOUSING: Solid Split

SEAL TYPE: Solid Split

CONSTRUCTION MATERIAL: Bronze Stainless
 Other:

TOTAL PIECES OF EQUIPMENT:

BRIEFLY DESCRIBE THE APPLICATION

CONTACT INFORMATION

Name: _____
 Company Name: _____
 Contact Number: _____
 Email Address: _____
 Date: _____